

DATASHEET



FEATURES

- ✓ High Visibility Line
- ✓ Adjustable Focus
- ✓ Custom Options Available

APPLICATIONS

- ✓ Measurement
- ✓ Bioanalytical
- ✓ Automation and Alignment

Operational Hazard of Laser Module

This laser module emits radiation that is visible/invisible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.



Limited Warranty

One year. No warranty coverage for disassembly, modifications, or damage due to abuse or misapplication.



SPECIFICATIONS

OPTICAL

| | |
|----------------------------|---|
| Wavelength | 520 ± 5 nm |
| Optical Output Power | Up to 75 mW |
| Laser Power Stability | < 1% (with heat sink) |
| Laser Structure | Single Mode |
| Laser Focus | Adjustable or Fixed (Optional) |
| Laser Line Thickness | < 1 mm @ 2 m distance. Focusable to < 0.5 mm at short distance (0.5 m) |
| Laser Class | Depends on fan angle |
| Divergence at collimation | < 1 mrad |
| Laser Fan Angles Available | 4, 15, 30, 45, 75, 90 degree |


ELECTRICAL

| | |
|------------------------|--------------------|
| Operating Voltage | 3.3 to 5 V DC |
| Operating Current | < 250 mA |
| Control Circuit | Auto Power Control |
| Electrical Connections | +Red, -Black |

MECHANICAL

| | |
|------------------------|------------------------------|
| Dimension | 15 mm (D) x 60 mm (L) |
| Operating Temperature | +10°C to +40°C |
| Storage Temperature | -40°C to +80°C |
| Heat Sink Requirements | Recommended for extended use |

OUTLINE DRAWING

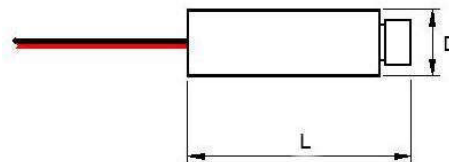




DATASHEET

FOCUS ADJUSTMENT OF LINE GENERATORS

The line generator lens assembly consists of: aspherical lens assembly *a* and cylindrical lens assembly *b*. Lens assembly *a* adjusts the coarse thickness of the line and lens assembly *b* adjusts the fine thickness of the line.

To focus the line at a given distance rotate lens assembly *a*, until you get the thinnest possible line. Your line at this point may look the line in Fig (II), thick in the center and thin along the edges.

To adjust to a thin line focused line (Fig (III)), keep lens assembly *a* fixed and gently rotate lens assembly *b* ($<90^\circ$) (making sure not to move lens assembly *a* during this process) until you get a thin uniform line as shown in Fig (III).

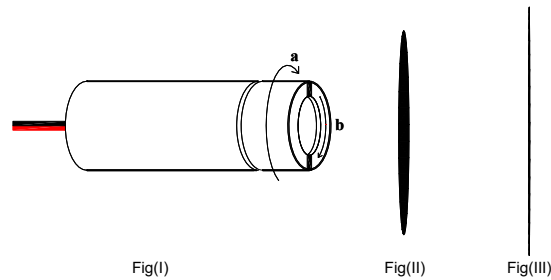

| Part Number | Power | Class |
|----------------|--------|-----------------|
| HPL-5G-520-** | < 5 mW | Varies with Fan |
| HPL-10G-520-** | 10 mW | Varies with Fan |
| HPL-25G-520-** | 25 mW | Varies with Fan |
| HPL-50G-520-** | 50 mW | Varies with Fan |
| HPL-75G-520-** | 75 mW | Varies with Fan |

