

For a conventional SiPM, the quenching resistors are usually fabricated on the surface, and used to connect all APD cells to trace metal lines. In contrast, NDL SiPM employs intrinsic epitaxial layer as the quenching resistors (EQR), and uses a continuous silicon cap layer as an anode to connect all the APD cells. As a result, the device has more compact structure and simpler fabrication technology, allows larger micro cell density (larger dynamic range) while retaining high photon detection efficiency (PDE).

Features

- ◆ Small Cell and Pitch
- ◆ High Cell Density and Fill Factor
- ◆ Large Dynamic Range and High PDE
- ◆ Fast Rise Time and Narrow Pulse Width
- ◆ Short Recovery Time and High Time Resolution
- ◆ Small Terminal Capacitance and Cost Effective


Applications

- ◆ High Energy Physics
- ◆ Fluorescence Measurement
- ◆ Nuclear Medical Imaging (PET, SPECT, CT)
- ◆ Radiation Detection and Imaging
- ◆ Optical Spectroscope
- ◆ Other Low Level Light Detection



Specifications

Type	EQR10 11-1010C-S	EQR10 11-3030D-S
Effective Pitch	10 μm	
Element Number	1×1	1×1
Active Area	1.0×1.0 mm^2	3.0×3.0 mm^2
Micro-cell Number	10000/ mm^2	
Typical Breakdown Voltage (V_B)	26.5 V	28.5 V
Temperature Coefficient for V_B	21 mV / °C	19 mV / °C
Recommended Operation Voltage	$V_B + 6$ V	$V_B + 12$ V
Peak PDE @420nm	32 %	36 %
Gain	2.0×10^5	1.7×10^5
Dark Count Rate (DCR)	500 kHz / mm^2	400 kHz / mm^2
Terminal Capacitance	7 pF / mm^2	3.5 pF / mm^2



Above parameters are measured at their recommended operation voltage and 20 °C, and they can operate at 77 K.

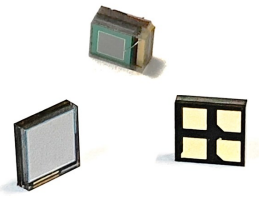


Characteristics

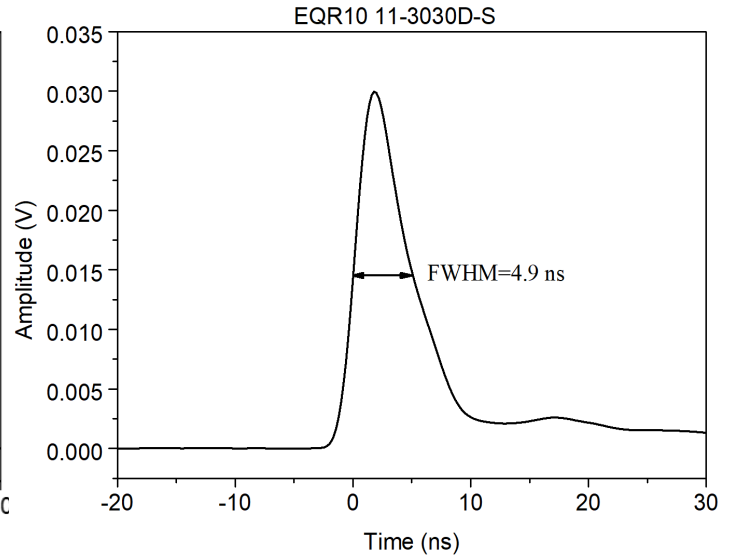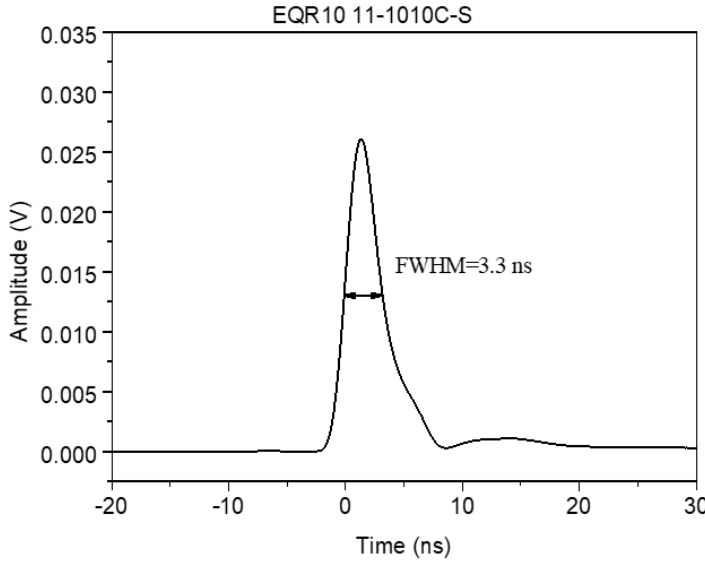



The single photoelectron pulse (amplified by a 40dB fast amplifier).

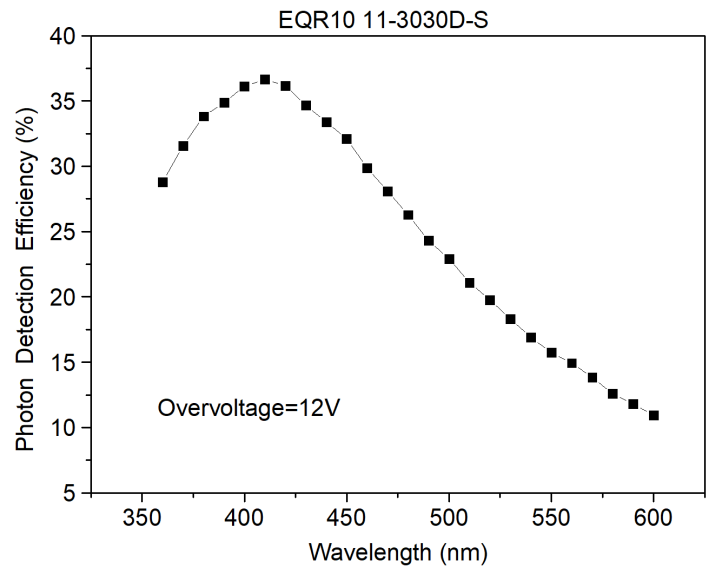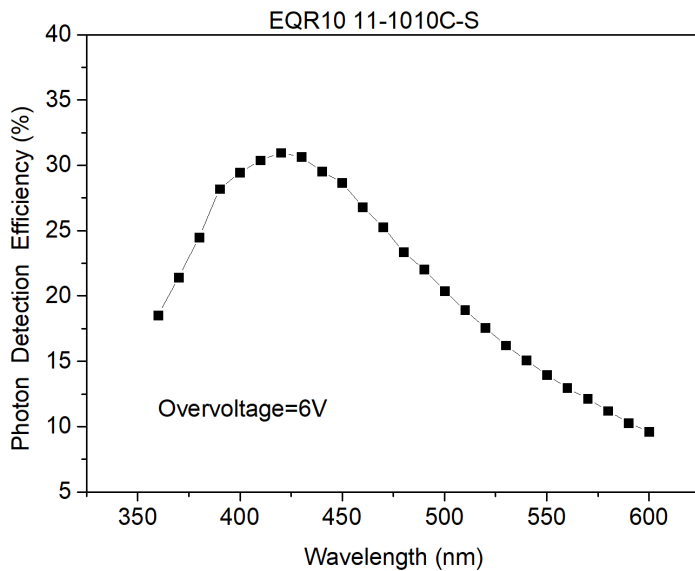


The PDE versus overvoltage and wavelength, deducted crosstalk and afterpulse and measured at 20 °C .

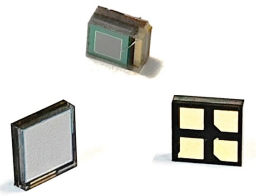


Dimensional outlines (unit: mm)

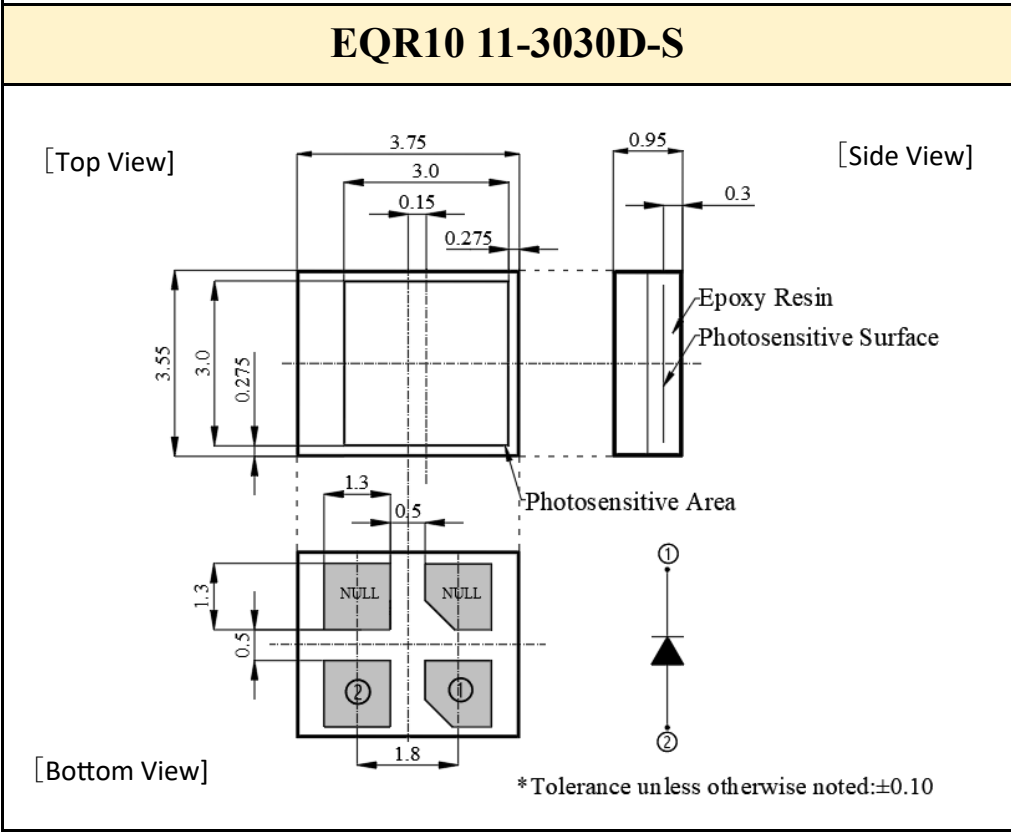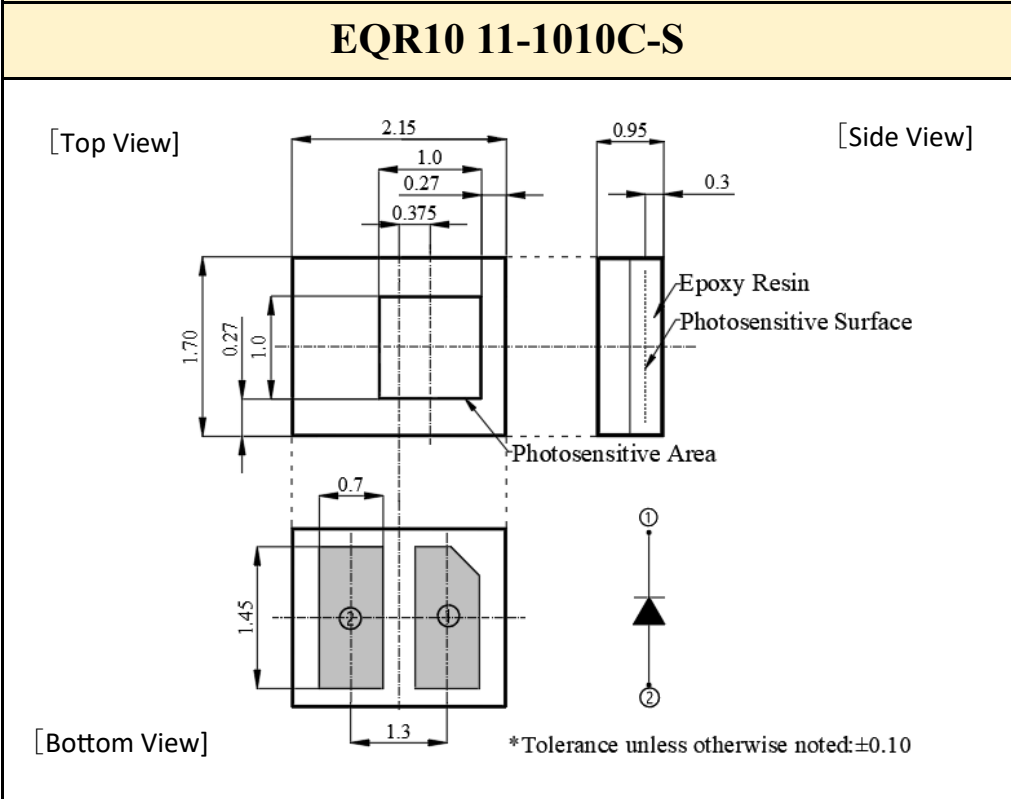


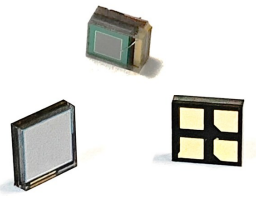

Recommended Solder Reflow Conditions

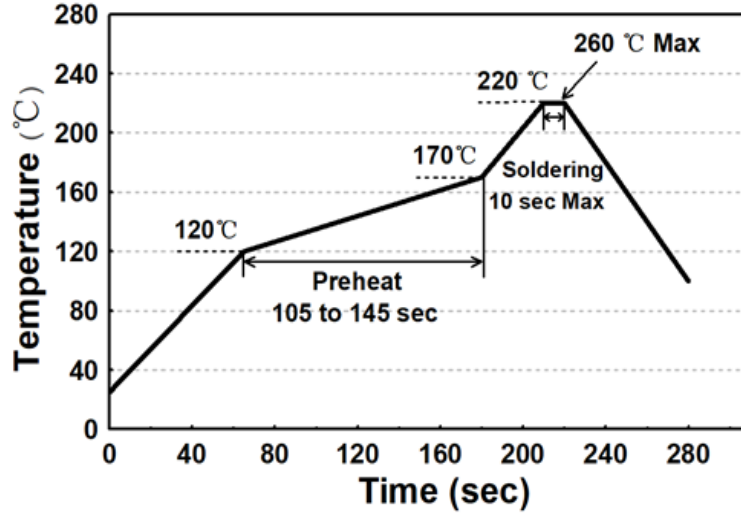

Basic Connection Diagrams

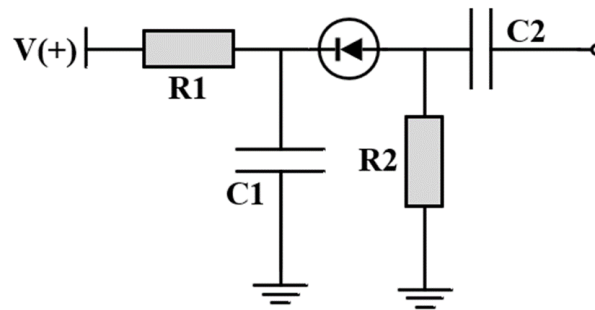

- R1 = 10 kΩ
- R2 = 1 kΩ
- C1 = 100 nF
- C2 = 10 nF