


C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

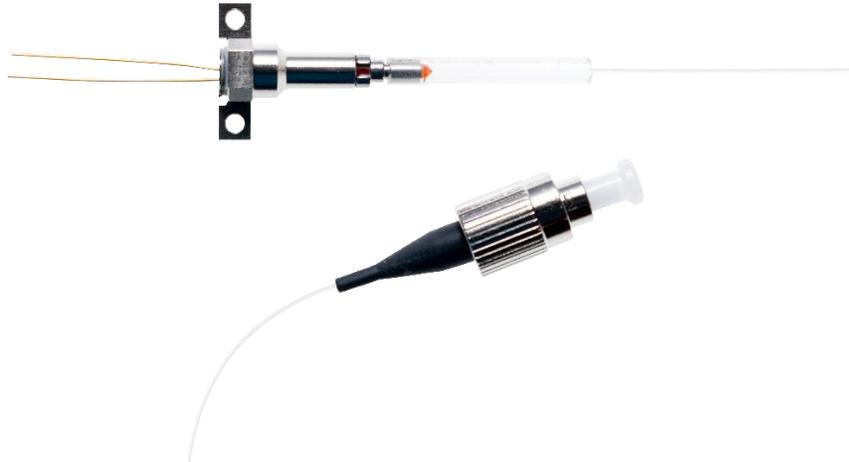

Excelitas' C30733BQC-01 Pigtailed Avalanche Photodiodes are high speed, high gain and low noise InGaAs APDs especially designed for telecom test equipment applications as OTDR.

Key Features

- Spectral response 1000 nm – 1700 nm
- Typical Operation Gain of 40
- Small Active Area of 30 μm
- High responsivity
- Low dark current and noise
- Pigtail design for easy fiber coupling
- RoHS compliant

Applications

- Optical time-domain reflectometer (OTDR)
- LiDAR / ToF measurements
- Eye-safe Laser range finding
- Optical communication systems
- Low Light Level Detection

All specifications are referring to an ambient temperature of $T_A = 22\text{ }^\circ\text{C}$, $\lambda = 1550\text{ nm}$ and $M = 40$, unless otherwise specified.

Table 1: Key parameters

Parameter	Symbol	Min	Typ	Max	Unit
Breakdown Voltage	V_{BD}	45	50	70	V
Spectral Range	$\Delta\lambda$	1000		1700	nm
Peak Responsivity	λ_{peak}		1550		nm
Responsivity @ M_{min} and M_{typ}	R	9.4	37.6		A/W
Recommended Operating Gain ¹	M	10	40		

Note 1: For further information on the usage at different gains, please contact our experts at Excelitas Technologies.

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

Table 2: Ordering Information

Parameter	C30733BQC-01	Units
Useful Chip Diameter	30	μm
Pigtail Length	1	m
Pigtail Fiber	Single Mode (SM-9/125)	
Pigtail Termination	FC/APC	

Note 1: Alternative Fiber options available upon request

Table 3: Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Forward Current	I_F	5	mA
Reverse Current	I_R	0.4	mA
Total Power Dissipation	P_{tot}	20	mW
Storage Temperature	T_S	-60 ... 125	°C
Operating Temperature	T_{Op}	-20 ... 70	°C

Note 1: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device.

Note 2: Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 4: Optical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Units
Rise Time / Fall Time ¹	t_r / t_f		0.12		ns
Bandwidth	f_{3dB}			3	GHz
Quantum Efficiency ²	QE		75		%

Note 1: As estimated by $t_{r/f} = \frac{0.35}{f_{3dB}}$

Note 2: Quantum Efficiency is a not directly measurable quantity. The above specified typical parameter is linked to the typical responsivity by $QE = \frac{1240 R}{\lambda M}$.

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

Table 5: Electrical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Units
Temperature Coefficient of V_{BD}	$\Delta V/\Delta T$		0.14		V/°C
Capacitance	C			0.5	pF
Dark Current ^{1,4}	i_D		0.5	10	nA
Dark Noise ^{2,4}	i_N		0.3	0.50	pA/v(Hz)
Noise Equivalent Power ^{3,4}	NEP		8	13	fW/v(Hz)

Note 1: Surface (i_{DS}) and bulk (i_{DB}) dark current are contributing to the total dark current by $i_D = i_{DS} + i_{DB}M$.

Note 2: Due to the natural fluctuations of amplified charge carriers the APD will also generate noise when not illuminated. Since the noise characteristics and hence the signal-to-noise ratio (SNR) are dependent on the bandwidth (f_{3dB}) and operating wavelength (λ) inside the final system the illuminated noise

$$i_{ill} = \sqrt{2qf_{3dB}[i_{DS} + (i_{DB}M^2 + R_0(\lambda)M^2P)F]}$$

needs to be considered. Hence the SNR defines as

$$SNR = \frac{i_P^2}{i_{ill}^2} = \frac{(PR_0(\lambda)M)^2}{i_{ill}^2}$$

with P the incident optical power in W, $R_0(\lambda)$ the intrinsic ($M = 1$) responsivity in A/W, q the charge carrier and an excess noise factor of typical 5.5 for InGaAs materials.

Note 3: The NEP is specified in dark conditions as $NEP = \frac{i_N}{R(\lambda)}$


Note 4: Specified for Gain $M = 40$.

The optimum Operation Point for M can be identified by a Signal-to-Noise-Ratio analysis as described in Note 2.

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

Figure 1: Mechanical Characteristics

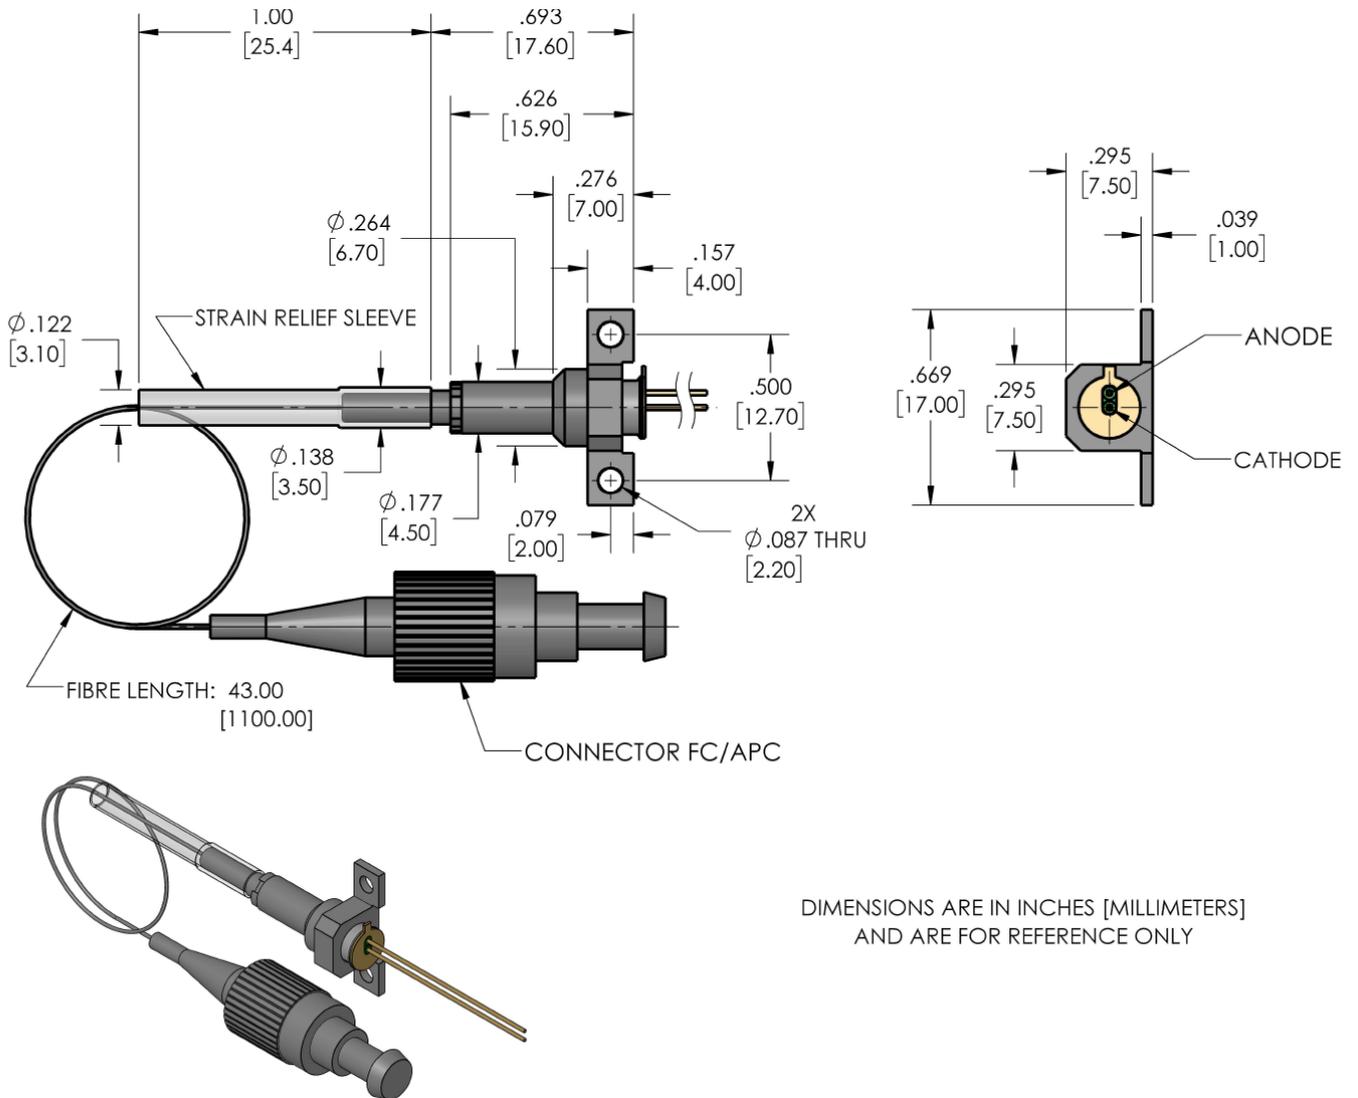

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

Figure 2: Typical Responsivity

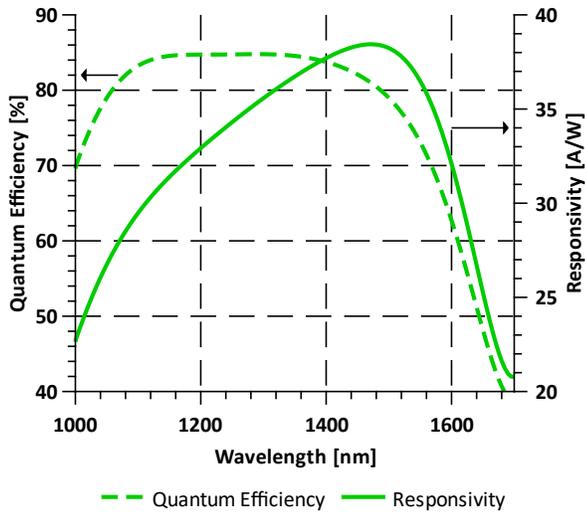


Figure 3: Typical Dark Noise

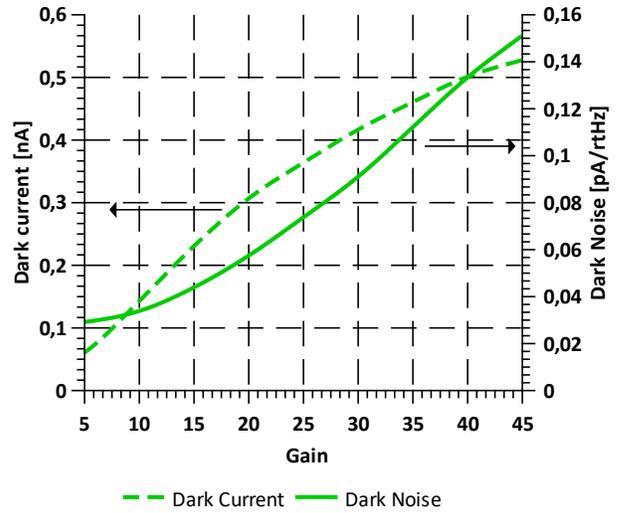


Figure 4: Typical Gain


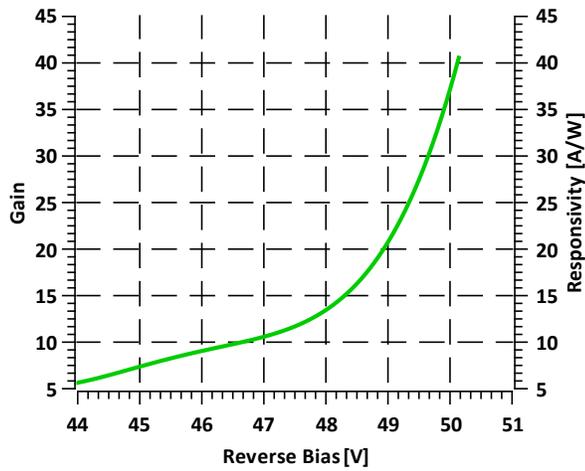


Figure 5: Typical Noise Equivalent Power

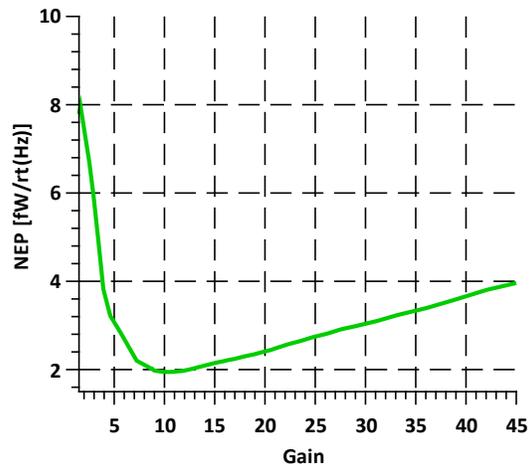

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

Information

Excelitas Technologies' C30733BQC-01 Pigtailed APDs are small size, high speed InGaAs/InP avalanche photodiodes. Due to the small active area of 30 μm these photodiodes provide highest gains at high quantum efficiency. Their low noise levels provide high signal to noise ratios and low NEP values, perfectly suited for small signal applications as OTDR or other telecom test equipment.

Testing methods

Excelitas verifies the electro optical specifications on every device. Hence, a specific voltage, V_{OP} , is supplied with each device. When the photodiode is operated at this voltage (at 22 °C), it will meet the electrical specifications shown above.

Visual inspection during fabrication is performed as per our quality standard and failed dies are removed.

The following parameters are part of Excelitas testing procedures:

- Measurement at 1300 nm or 1550 nm
- Breakdown Voltage ($I_R = 1 \mu\text{A}$)
- Reach-Through Voltage
- Operating Voltage ($M = 40$)
- Dark Current ($M = 40$)

Excelitas Technologies is certified to meet ISO-9001 and are designed to meet MIL-STD-883 and/or MIL-STD-750 specifications.

Packaging and shipping

The modules are shipped in individually sealed plastic packages.

Storage and handling

Excelitas highly recommends following the below notes:

- Keep devices in an ESD controlled environment until final assembly.
- Do not open any housings.
- Do not contact the unprotected end of the fiber pigtail

C30733BQC-01 Pigtailed InGaAs APD

Low Noise Avalanche Photodiodes for OTDR applications

RoHS Compliance

This series of APD diodes are designed and built to be fully compliant with the European Union Directive on restrictions of the use of certain hazardous substances in electrical and electronic equipment.



Warranty

A standard 12-month warranty following shipment applies. Any warranty is null and void if the photodiode package or pigtail assembly has been opened or manipulated.

About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers.

Excelitas has a long and rich history of serving our OEM customer base with optoelectronic sensors and modules for more than 45 years beginning with PerkinElmer, EG&G, and RCA. The constant throughout has been our innovation and commitment to delivering the highest quality solutions to our customers worldwide.

From aerospace and defense to analytical instrumentation, clinical diagnostics, medical, industrial, and safety and security applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 7,000 employees in North America, Europe and Asia, serving customers across the world.

Excelitas Technologies
22001 Dumberry Road
Vaudreuil-Dorion, Quebec
Canada J7V 8P7
Telephone: (+1) 450.424.3300
Toll-free: (+1) 800.775.6786
Fax: (+1) 450.424.3345

**Excelitas Technologies
GmbH & Co. KG**
Wenzel-Jaksch-Str. 31
D-65199 Wiesbaden
Germany
Telephone: (+49) 611 492 430
Fax: (+49) 611 492 165

Excelitas Technologies Singapore, Pte. Ltd.
8 Tractor Road
Singapore 627969
Telephone: (+65) 6775 2022 (Main number)
Telephone: (+65) 6770 4366 (Customer Service)
Fax: (+65) 6778-1752



Contact us at: <https://www.excelitas.com/contact>

For a complete listing of our global offices, visit www.excelitas.com/locations

© 2023 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.