

Single Mode VCSEL 763 $\pm$ 3 nm TEC & E2000

- ◆ Vertical Cavity Surface-Emitting Laser
- ◆ internal TEC and Thermistor
- ◆ E2000 receptical, 760 nm single-mode fiber
- ◆ 2nm tunability with TEC
- ◆ High performance and reliability



INVISIBLE LASER RADIATION
AVOID BEAM EXPOSURE
CLASS 3B LASER PRODUCT

ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	UNITS	MIN	TYP	MAX	TEST CONDITIONS
Emission wavelength	λ_R	nm	760	763	766	T=20°C, I _{TEC} =0, P _{OP} =0.1mW
Threshold current	I _{TH}	mA		0,5		T=20°C
Output power	P _{opt}	mW	0,1			T=0 .. 50°C, coupled into SM fiber
Threshold voltage	U _{TH}	V		1,8		
Laser current	I _{OP}	mA			2,0	P _{opt} =0.1 mW
Laser voltage	U _{OP}	V		2,0		P _{opt} =0.1 mW
Wallplug efficiency	η_{WP}	%		12		P _{opt} =0.1mW
Slope efficiency	η_S	W/A		0,1		T= 20°C
Differential series resistance	R _S	Ω		250		P _{opt} =0.1 mW
3dB modulation bandwidth	V _{3dB}	GHz	0.1			P _{opt} =0.1 mW (due to ESD protection diode)
Relative intensity noise	RIN	dB/Hz		-130,0	-120,0	P _{opt} = 0.1 mW @ 1 GHz
Wavelength tuning over current		nm/mA		0,60		
Wavelength tuning over temperature		nm/K		0,06		
Thermal resistance (VCSEL chip)	R _{thermal}	K/mW	3		5	
Side mode supression		dB	30			
Spectral bandwidth	$\Delta\lambda$	MHZ		100,0		P _{opt} =0.1 mW
TEC current		mA			500,0	
NTC Thermistor Resistance		K Ω	9,5	10	11	T=25°C
NTC Temperature Dependence		K Ω		10/exp[3892*(1/298K-1/T _{op})]		
Wavelength tuning over TEC current		nm/mA		0,008		TEC current < 200 mA
ESD damage treshold		V	2.000			Human body modul


ABSOLUTE MAXIMUM RATINGS

Storage temperature	-40 .. 125°C
Operating temperature	-20 .. 80°C
Electrical power dissipation	7.5 mW
Continuous forward laser current	3 mA
Laser reverse voltage	8V
Soldering temperature*:	270°C
(*TEC temperature must be below 150°C)	


NOTICE: Stresses greater than those listed under „Absolute Maximum Ratings“ may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated for extended periods of time may effect device reliability.




ATTENTION: Electrostatic Sensitive Devices
Observe Precautions for Handling




LIV

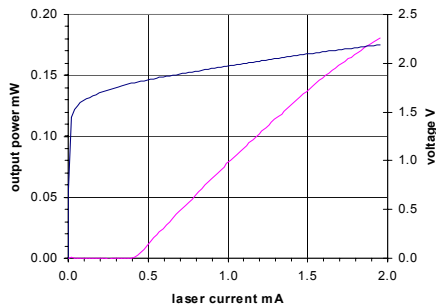


Spectral Characteristics

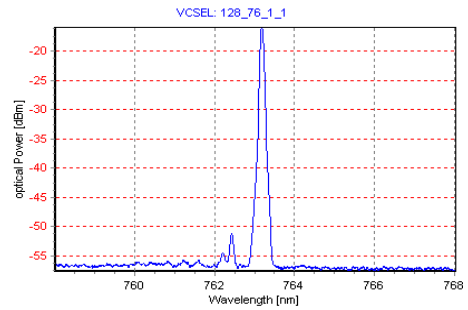

E2000 receptacle

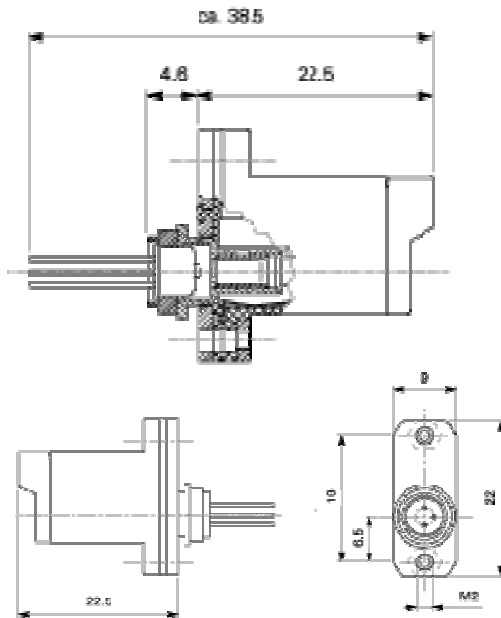

PIN layout

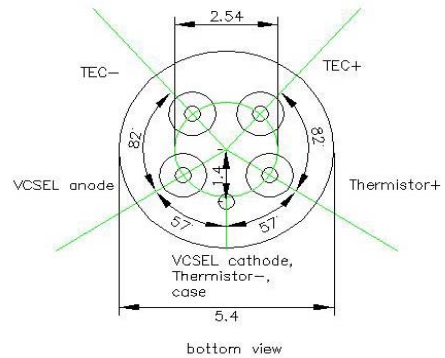

For order please use:

ULM763-03-TN-SE2BTT

OPTION: Customer specific wavelength selection on request

Basic Product Code ULM Photonics

