

650nm 5mW 50 °C Low Current Operation

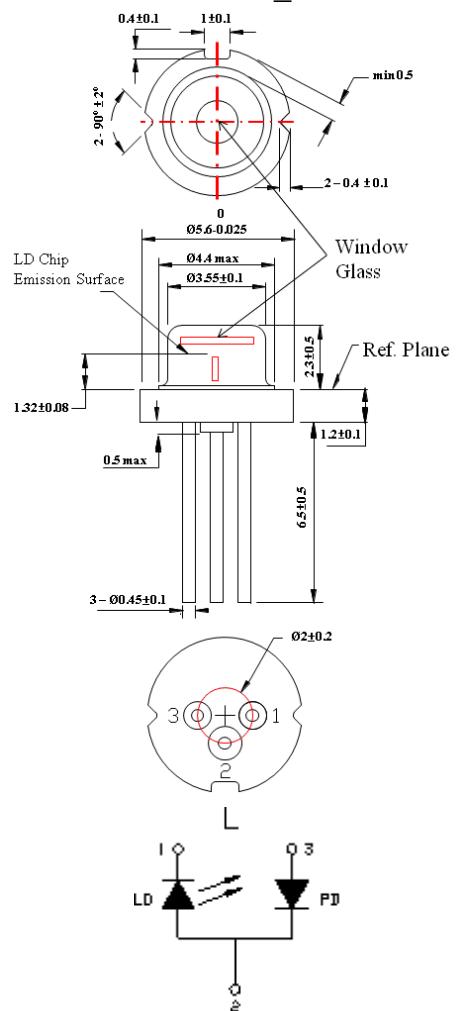
Features

1. Low operating current
2. High efficiency
3. FFP single lateral mode

Applications

1. Laser pointers
2. Industrial laser markers / measuring instruments
3. Bar code readers

6-2D-LD65-004_Rev.02

**Absolute maximum ratings**

Parameter	Symbol	Condition	Rating	Unit
Light output power	P _o	CW	7	mW
Reverse voltage (LD)	V _{RL}	-	2	V
Case temperature	T _c	-	-10~+50	°C
Storage temperature	T _s	-	-40~+85	°C

Electrical and optical characteristics (T_c=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	645	655	660	nm	P _o =5 mW
Threshold current	I _{th}	-	15	20	mA	
Operating current	I _{op}	-	20	22	mA	P _o =5mW
Operating voltage	V _{op}	-	2.2	2.5	V	P _o =5mW
Differential efficiency	η	0.5	1.0	1.4	mW/mA	P _o =3-5mW
Monitor current	I _m	0.05	0.1	0.3	mA	Po=5mW, VRD=5V
Parallel divergence angle	θ _{//}	6	8	12	deg.	P _o =5mW
Perpendicular divergence angle	θ _⊥	24	27	32	deg.	
Parallel FFP deviation angle	Δ θ _{//}	-3	0	+3	deg.	
Perpendicular FFP deviation angle	Δ θ _⊥	-3	0	+3	deg.	
Emission point accuracy	Δ xΔyΔz	-80	0	+80	um	

• Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

650nm 5mW 50 °C Low Current Operation

