




### Features

- High reliability
- Spectral Selectivity
- Easy to use in lock-in circuits
- Parabolic reflector

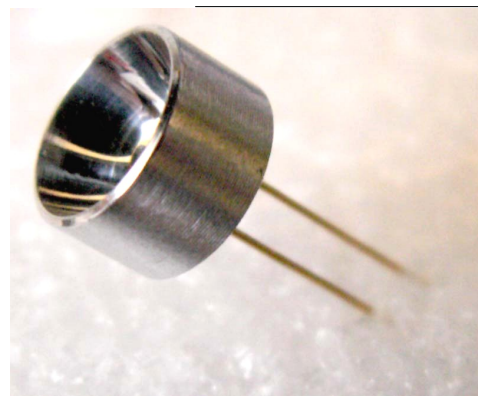


### Applications

- Measuring equipment
- Gas analysis (H<sub>2</sub>)
- Analytical spectral devices

### Options

- Power supply: [LED Driver D-31M](#)

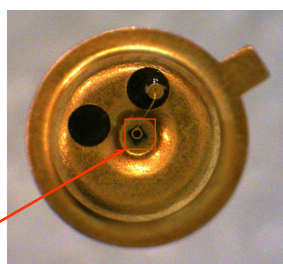

LED chip

### Description

Light emitting diode **LED07HP-PR** demonstrates typical maximum of emitting wavelength of  $\lambda_P = 0.73 \mu m$  (I = 100 mA, f = 0.5 KHz, duty cycle: 50%).

The components is mounted in a standard 5.5 mm TO-18 package with parabolic reflector (PR).

Related products: **LED07HP-PR** can be used in optical pair with our [PD24](#) photodiodes.

### General characteristics

Package	Parameter	Symbol	Value	Unit
TO-18 with PR	Maximum operating current	I* <sub>QCW</sub>	150	mA
		I** <sub>Pulsed</sub>	1500	
	Soldering temperature	T <sub>s</sub>	+ 230	°C
	Operating temperature	T <sub>opr</sub>	- 30...+ 50	°C
	Storage temperature	T <sub>stg</sub>	- 55...+ 60	°C
	Weight	m	0.68	g
	Size	D	9.0	mm
H		18.5		

\* Quasi-CW mode: Repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%

\*\* Pulse mode: Repetition rate: 0.5 kHz, pulse duration: 2 μs, duty cycle: 0.1%

## Electrical and optical characteristics


Parameter	Symbol	Condition	Min	Max	Unit
Peak emission wavelength	$\lambda_p$	$I_F = 100 \text{ mA}$	$\lambda_{typ} = 0.73$		$\mu\text{m}$
			0.72	0.74	
Spectral FWHM	$\Delta\lambda$	$I_F = 100 \text{ mA}$	35	55	nm
Pulse optical power	$P^*_{QCW}$	$I_F = 100 \text{ mA}$	25	55	mW
	$P^{**}_{Pulsed}$	$I_F = 1000 \text{ mA}$	150	350	
Forward voltage	$V_F$	(*)	1.6	2.0	V
Switching time	$\tau$		10	30	ns

\* Quasi-CW mode: repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%, current: 100 mA


\*\* Pulse mode: repetition rate: 0.5 kHz, pulse duration: 2  $\mu\text{s}$ , duty cycle: 0.1%, current: 1 A




Electroluminescence spectra

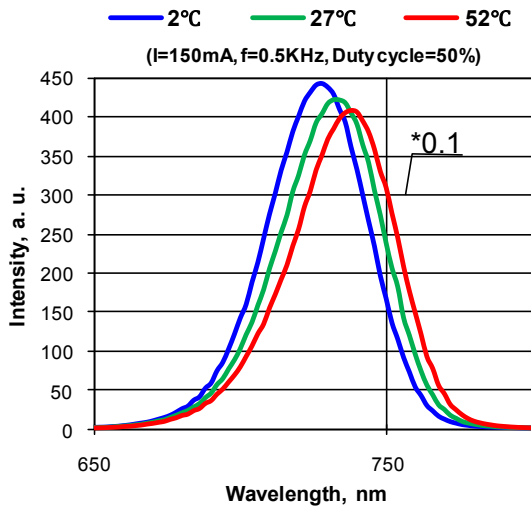


Pulse optical power vs. current

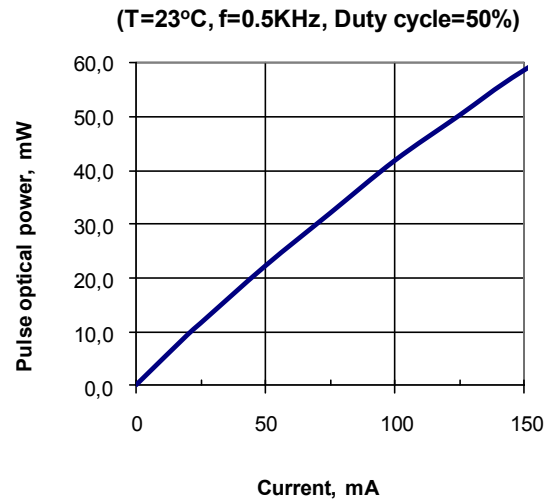



Current vs. voltage

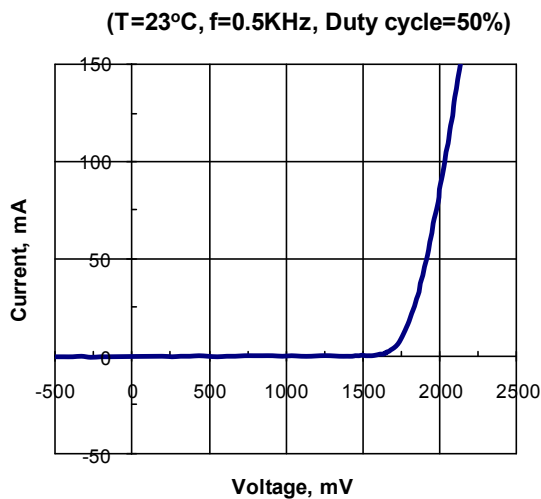

Field pattern

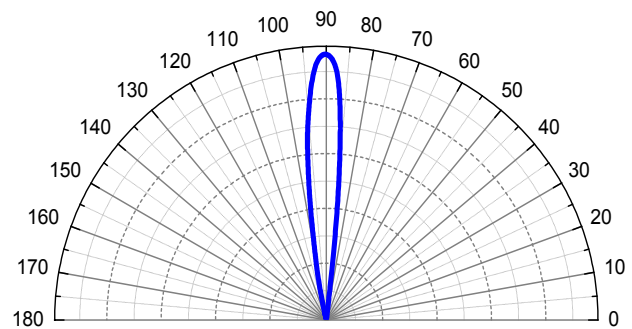

▼ TO-18 package with PR - dimensions (mm)

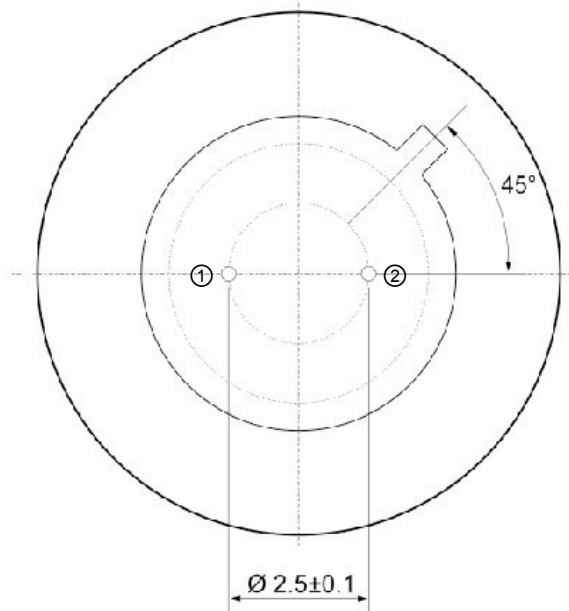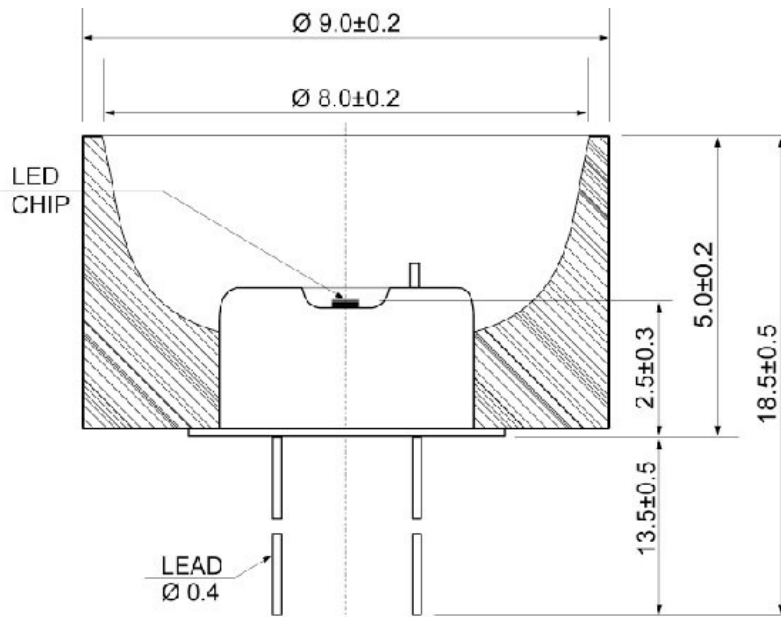

Pin	Description
① Common to case	Diode (cathode)*
②	Diode (anode)*

\* Attention: Pin polarity can be changed.