



Features

- High optical power
- High reliability
- Spectral Selectivity
- Easy to use in lock-in circuits
- Parabolic reflector with window

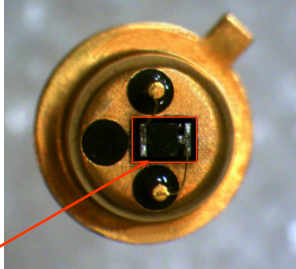

LED chip

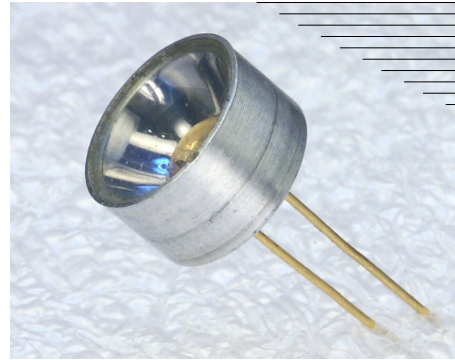

Applications

- Measuring equipment
- Gas analysis
- Analytical spectral devices

Options

- Power supply: [LED Driver D-31M](#)

▼ Description

Light emitting diode **LED09FCHP-PRW** demonstrates typical maximum of emitting wavelength of $\lambda_p = 0.90 \mu\text{m}$ ($I = 100 \text{ mA}$, $f = 0.5 \text{ kHz}$, duty cycle: 50%).

Light emitting diode **LED09FCHP-PRW** is equipped with quartz window. The components is mounted in a standard 5.5 mm TO-18 package with parabolic reflector (PR).

Related products: **LED09FCHP-PRW** can be used in optical pair with our [PD24](#) photodiodes.

▼ General characteristics

Package	Parameter	Symbol	Value	Unit
TO-18 with PRW	Maximum operating current	I_{OCW}^*	150	mA
		I_{Pulsed}^{**}	1500	
	Soldering temperature	T_s	+230	°C
	Operating temperature	T_{opr}	-30...+50	°C
	Storage temperature	T_{stg}	-55...+60	°C
	Weight	m	0.68	g
	Size	D	9.0	mm
H		18.5		

* Quasi-CW mode: Repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%

** Pulse mode: Repetition rate: 0.5 kHz, pulse duration: 2 μs , duty cycle: 0.1%


▼ Electrical and optical characteristics

Parameter	Symbol	Condition $T_a \approx +20\text{ }^\circ\text{C}$	Min	Max	Unit
Peak emission wavelength	λ_p	$I_F = 100\text{ mA}$	$\lambda_{typ} = 0.90$		μm
			0.86	0.93	
Spectral FWHM	D_λ	$I_F = 100\text{ mA}$	50	70	nm
Pulse optical power	P^*_{QCW}	$I_F = 100\text{ mA}$	15	45	mW
	P^{**}_{Pulsed}	$I_F = 1000\text{ mA}$	90	270	
Forward voltage	V_F	(*)	1.4	1.7	V
Switching time	t		10	30	ns


* Quasi-CW mode: repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%, current: 100 mA

** Pulse mode: repetition rate: 0.5 kHz, pulse duration: 2 μs , duty cycle: 0.1%, current: 1 A


▼ **Electroluminescence spectra**

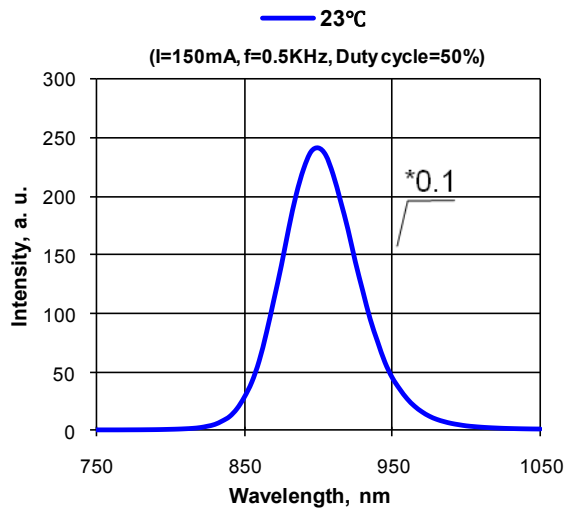


▼ **Pulse optical power vs. current**

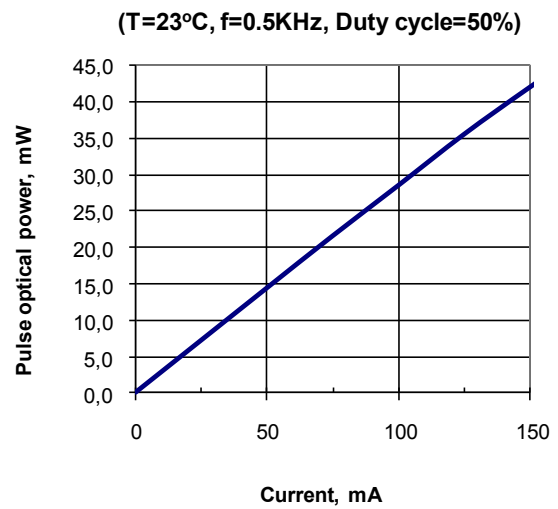


▼ **Current vs. voltage**

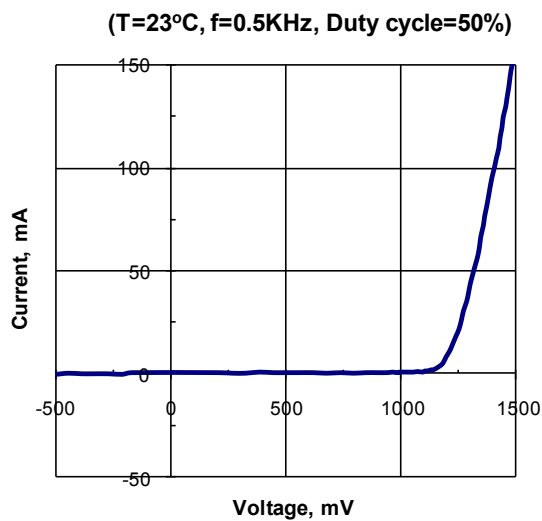

▼ **Field pattern**

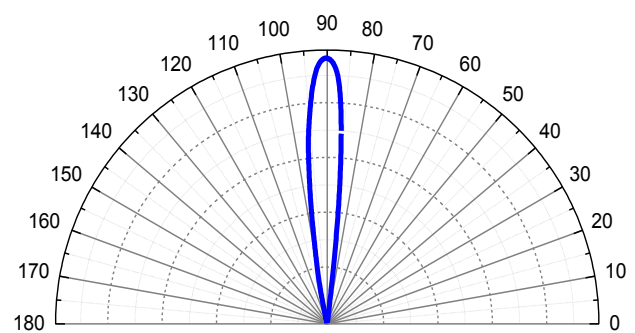

▼ **TO-18 package with PR - dimensions (mm)**

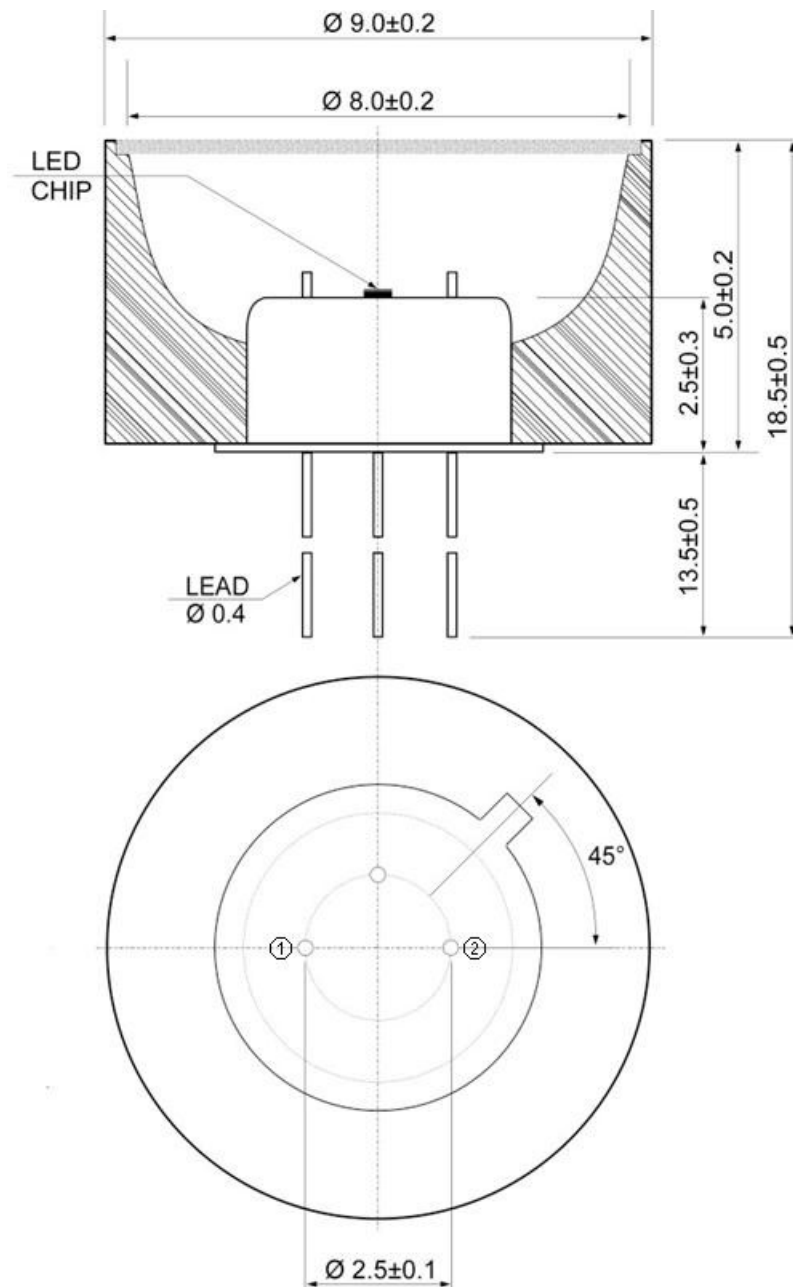

Pin	Description
① Common to case	Diode (cathode)*
②	Diode (anode)*

* **Attention:** Pin polarity can be changed.