

# PT277 SERIES



PT277 series laser systems integrate a picosecond optical parametric oscillator (OPO) and a pump laser in a single compact housing. Mounting the components on the same frame provides a robust solution. It makes laser installation shorter, improves long-term stability, and reduces maintenance costs.

The laser is hermetic and has an internal air cleaning system to clean from water vapor and organics, making it an excellent source for spectroscopic applications.

Nearly diffraction-limited divergence and beam-direction stability throughout the entire spectral tuning range are essential in tunable radiation applications requiring high-precision laser beam focusing.

Fast and fully automatic wavelength tuning is achieved by advanced microprocessor control. The wavelength tuning elements are mounted on precise closed-loop micro-stepping motors. The temperatures of the nonlinear crystals are controlled by precise thermo-controllers. No additional manual adjustment of the laser system is needed.

For customer convenience the system can be controlled by a keypad and/or any controller running on any OS using REST API commands. Variety of interfaces USB, RS232, LAN, WLAN (optionally) ensures easy control and integration with other equipment.

## Single Housing Mid-Infrared Tunable Picosecond Laser System

### FEATURES

- ▶ **Tuning range 1403 – 17000 nm (7127 – 600 cm<sup>-1</sup>)**
- ▶ **Hands-free tuning:** motorized for the entire tuning range
- ▶ **Linewidth <5 cm<sup>-1</sup>** in the entire tuning range
- ▶ **Nearly diffraction limited divergence**
- ▶ **Beam direction stability in the entire tuning range**
- ▶ **Single housing:** integrates a pump laser and OPO in a single housing
- ▶ **Internal air cleaning system**
- ▶ **PC control via USB (virtual COM port), RS232, LAN using REST API commands**

### APPLICATIONS

- ▶ **Infrared spectroscopy**
- ▶ **SNOM (scanning near field microscopy)**

### PT277 series features two models

Model	Features
PT277-SI	provides <b>a narrowband radiation</b> with a linewidth <5 cm <sup>-1</sup> in the entire tuning range: 1403 – 2020 nm (7127 – 4951 cm <sup>-1</sup> ) 2250 – 4400 nm (4444 – 2273 cm <sup>-1</sup> )
PT277-XIR	provides <b>a narrowband radiation</b> with a linewidth <5 cm <sup>-1</sup> in the entire tuning range: 1403 – 2020 nm (7127 – 4951 cm <sup>-1</sup> ) 2250 – 4400 nm (4444 – 2273 cm <sup>-1</sup> ) 12500 – 17000 nm (800 – 600 cm <sup>-1</sup> ) *

\* Inquire about the available spectral range.

**SPECIFICATIONS <sup>1)</sup>**

Parameter	PT277-SI	PT277-XIR
<b>OUTPUT SPECIFICATIONS</b>		
Tuning range		
Signal	1403 – 2020 nm (7127 – 4951 cm <sup>-1</sup> )	
Idler	2250 – 4400 nm (4444 – 2273 cm <sup>-1</sup> )	
DFG	–	12500 – 17000 nm (800 – 600 cm <sup>-1</sup> ) <sup>2)</sup>
Output power <sup>3)</sup>		
@ 1403 – 2020 nm (Signal)	> 400 mW	
@ 2250 – 4000 nm (Idler)	> 100 mW	
@ 12500 nm (DFG)	–	> 10 mW
Linewidth	< 5 cm <sup>-1</sup>	
Pulse repetition rate	~ 87 MHz (same as that of the pump laser)	
Pulse duration	~8 ps	
Typical beam diameter <sup>4)</sup> (at 1/e <sup>2</sup> level)	~ 3 mm @ 3000 nm	
Typical beam divergence <sup>5)</sup>	< 5 mrad @ 1600 nm	
Beam pointing stability	< 50 μrad rms @ 1600 nm	
Polarization		
Signal and idler	linear, vertical	
DFG	–	linear, vertical
Fast spectral scan speed for spectral range		
From 1403 to 2020 nm (Signal)	< 4 s	
From 2250 to 4400 nm (Idler)	< 4 s	
From 12500 to 16000 nm (DFG)	–	< 2 s
Output power modulation frequency (AOM)	0 Hz – 2 MHz	
<b>PHYSICAL CHARACTERISTICS</b>		
Laser unit size (W×L×H)	320 × 766 × 241 mm	
Power supply size (W×L×H)	483 × 140 × 390 mm , stand-alone	
Chiller (third-party, approx.) (W×L×H)	290 × 420 × 290 mm , stand-alone	
Umbilical length	2.5 m	
<b>SERVICE AND OPERATION REQUIREMENTS</b>		
Cooling	water-air	
Room temperature	22 ± 2 °C	
Room temperature stability	± 1 °C	
Relative humidity	< 80 % (non-condensing)	
Power requirements	100 – 240 VAC (-10% / +5%), single phase, 50/60 Hz	
Power consumption	< 1 kW	
Cleanness of the room	not worse than ISO Class 9	

- <sup>1)</sup> All specifications are subject to change without notice. The parameters given in the table are indicators of the typical performance of the laser system. They may vary with each manufactured laser system.
- <sup>2)</sup> Inquire about the available spectral range.
- <sup>3)</sup> Output powers are specified at selected wavelengths. See typical tuning curves for power at other wavelengths. Power drops are possible.
- <sup>4)</sup> May vary depending on pump pulse energy.
- <sup>5)</sup> Full angle at FWHM level.



**Note:** The laser must be connected to the mains electricity all the time. If there will be no mains electricity for longer than 1 hour then the laser system needs to warm up for a few hours before switching radiation on. The laser and auxiliary units must be installed in a place free from dust and aerosols. It is advisable to operate the laser in an air-conditioned room and to place the laser at a distance from air conditioning outlets. The laser should be positioned on a solid optical table. Access from both sides should be ensured. Intense sources of vibrations like freight elevators, railway stations, etc. should be avoided nearby.

**TUNING CURVES**

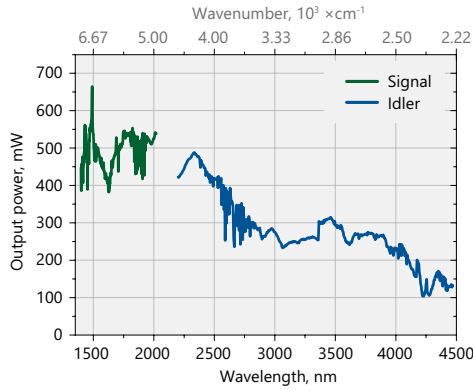


Fig 1. Typical PT277-SI laser system output tuning curve.  
The actual tuning curve might differ from presented here.

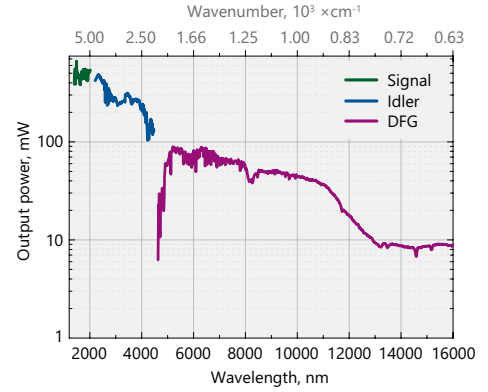


Fig 2. Typical PT277-XIR laser system output tuning curve.  
The actual tuning curve might differ from presented here.  
\* Inquire about the available spectral range.

**OPTIONS**

► **Option -H**

1064 nm output, <0.5 W at 1064 nm output power.

**OUTLINE DRAWINGS**

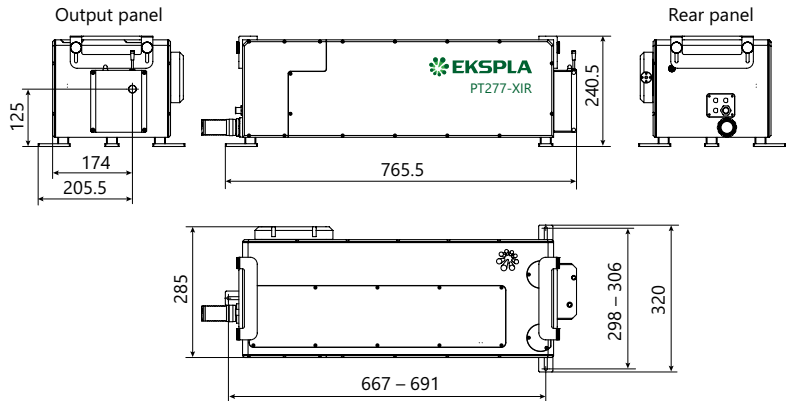


Fig 3. External dimensions of PT277-XIR and PT277-SI laser units (the same external housing)



Fig 4. PT277-SI laser features the same external housing as PT277-XIR



Fig 5. PT277-XIR and PT277-SI lasers feature easy attachable handles that enable easy transportation and installation