

Thermoelectric Cooled HgCdTe (MCT)


TECHNICAL DATA & INFORMATION

Infrared Associates, Inc. offers high quality Liquid Nitrogen cooled HgCdInfrared Associates, Inc. offers high quality Liquid Nitrogen cooled HgCdTe detectors. Each detector is optimized for specified wavebands of; 2µm to 5µm, 2µm to 13µm or our FTIR Series with wavebands up to 2µm to 24µm, as shown in the table below.

The FTIR series of HgCdTe detectors are designed to achieve optimum performance in Fourier Transform Infrared spectrometers. The detectors offer the highest sensitivities with cutoffs ranging from 750 to 400 cm-1.

A variety of dewar designs are available, all supplied with wedged windows to eliminate interference effects. In addition to the standard sizes listed in the following <u>table</u>, custom configurations are available on request. Custom packaging, both metal and glass, designed to interface with customer specified cooling systems, is also available.

<u>Accessories</u> such as Preamplifiers, Valve Operators and Square Base Adapters are also available.

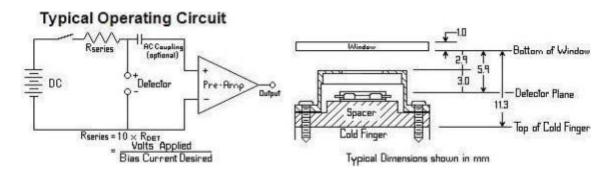

Standard Liquid Nitrogen cooled HgCdTe Detectors

Model Number	Element Size (mm)	Wave- length Peak λp (μm)	Wavelength Response (20% λco) (μm)	D* (λp,10000,1) Jones	Responsivity (pk, (V/W))	Resistance (Ω)	Time Constant(µsec)	Std.Pkg	Std. Window
				2 µm to	5 µm				
MCT-5-N-0.05	0.05 X 0.05				≥100,000			MSL-8 MSL-12	
MCT-5-N-0.10	0.10 X 0.10				≥50,000				
MCT-5-N-0.25	0.25 X 0.25			≥1.0E11	≥10,000			OR	
	0.50 X 0.50	~4.5	≥5.0		≥4,000	50-500	~2.0	MDL-8 MDL-12	Sapphire
MCT-5-N-1.00	1.00 X 1.00				≥2,000				
MCT-5-N-2.00	2.00 X 2.00			≥8.0E10	≥1,000				
		1		2 µm to	13 µm		I	1	
MCT-13025	0.025 X .025				≥100,000				
MCT-13-0.05	0.05 X 0.05		≥13.0 (750cm-1)	≥5.0E10	≥60.000	-20-100	~1.0	MSL-8 MSL-12 OR MDL-8 MDL-12	ZnSe (2- 14mm)
MCT-13-0.10	0.10 X 0.10	~12.0 -			≥30,000				
MCT-13-0.25	0.25 X 0.25				≥10,000				
MCT-13-0.50	0.50 X 0.50			≥4.0E10	≥5,000				
MCT-13-0.50 MCT-13-1.00	1.00 X 1.00				≥2,000 ≥2,000				
MCT-13-2.00	2.00 X 2.00			≥3.0E10	≥500				
WIG1-13-2.00	2.00 X 2.00			_J.UL 10	2300				
			2 µm t	o 24 µm '	"FTIR Ser	ies			
FTIR-16-0.10	0.10 X 0.10				≥10,000				
FTIR-16-0.25	0.25 X 0.25	1		≥4.0E10	≥3,000			MSL-8	
FTIR-16-0.50	0.50 X 0.50	1			≥1,500			MSL-12	
		~14.0	≥16.0			20-100		OR	ZnSe/W
FTIR-16-1.00	1.00 X 1.00		(625cm-1)	≥3.0E10	≥1,000	_	~0.5	MDL-8 MDL-12	
FTIR-16-2.00	2.00 X 2.00			≥2.0E10	≥200				
FTIR-22-0.25	0.25 X 0.25	~18.0	≥22.2 (450cm-1)	≥1.0E10	≥700	20-100	~0.3	Same as FTIR-16	ZnSe/W
FTIR-22-0.50	0.50 X 0.50				≥350				
FTIR-22-1.00	1.00 X 1.00				≥150				
FTIR-24-0.25	0.25 X 0.25	1	≥24.0		≥200	20-100	~0.2	Same as	KRS-5/W
FTIR-24-1.00	1.00 X 1.00	~18.0	(415cm-1)	≥5.0E9	≥50	1		FTIR-16	
1 1111-24-1.00	1.00 X 1.00	10.0	(413611-1)	23.023	≥50			11111110	

MSL-8 Side Looking Metal Dewar---8 Hour Hold Time MDL-8 Down Looking Metal Dewar---8 Hour Hold Time

MSL-12 Side Looking Metal Dewar---12 Hour Hold Time
MDL-12 Down Looking Metal Dewar---12 Hour Hold Time